


4406

6 litre Click Pack^y

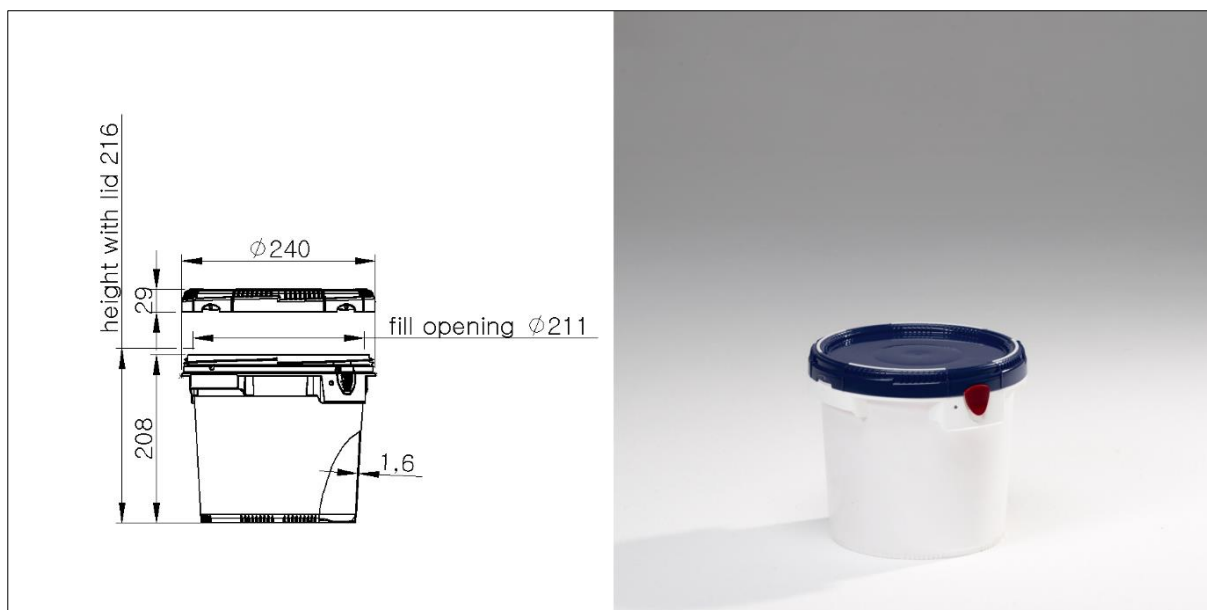

For dimensional tolerances see table on next page

Product part	Product code	Description	Materials
Container	4406-60-004	6 litre nestable container	HDPE
Lid	4401-60-611	Screw lid	HDPE
Gasket	/	Sealing gasket	TPE
Pin	4404-00-407	Tamper Evident Sealing Pin	PS

Capacity	Litres	US Gallons
Brimful	6.7	1.77
When closed	6.0	1.59

Weight	Grams	Ounces
Container	302	10.65
Lid (including gasket)	127	4.48
Pin	2	0.07
Total	431	15.20

Colours	Colour code	PMS references
Container	White 004	/
Lid	Blue 611	2767 C
Gasket	White 004	/
Pin	Red 407	188 C

Hazardous material information	
Hazardous material type	Solids
Packaging group	I – II – III
UN marking	1H2/X6/Y9/Z14/S/--/NL/ CURTEC-130556
Maximum gross mass (kg)	X=6 Y=9 Z=14

Product identification	Container	Lid
Manufacturer ID	Bottom	--
Country of origin	Bottom	--
Product code	Bottom	--
Recycle logo / Material type	Bottom	Inside
Date clock	Bottom	Inside
UN-mark	Handgrip	--
Food logo	Bottom	
Material track clock	Bottom	--

Other information
The container can be opened and closed with just a quarter-turn The lid is locked when it passes the safety button, confirmed by a 'click' Maximum filling temperature is 70°C/ 158°F Contents must have cooled to 30°C/ 86°F before containers can be closed and stacked DoC available on request UN certificate available on request MVTR declaration available on request Child resistant declaration available on request Other colours available on request User manual available on request

Dimensional tolerance (mm) according to DIN16742-TG7																
Over	1	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	>630	>800
up to	3	6	10	18	30	50	80	120	180	250	315	400	500	630	800	1000
NW (±)	0.20	0.29	0.35	0.42	0.50	0.60	0.90	1.25	1.45	1.60	1.80	2.60	3.50	4.00	4.50	5.00

Weight tolerance
All products have a tolerance of ±4% on the initial weight mentioned on this data sheet

© 2016 Property of CurTec International B.V. All rights explicitly reserved, it is not allowed to copy or communicate to other parties without written consent of CurTec.