


# 4315

## 1500 ml Packo

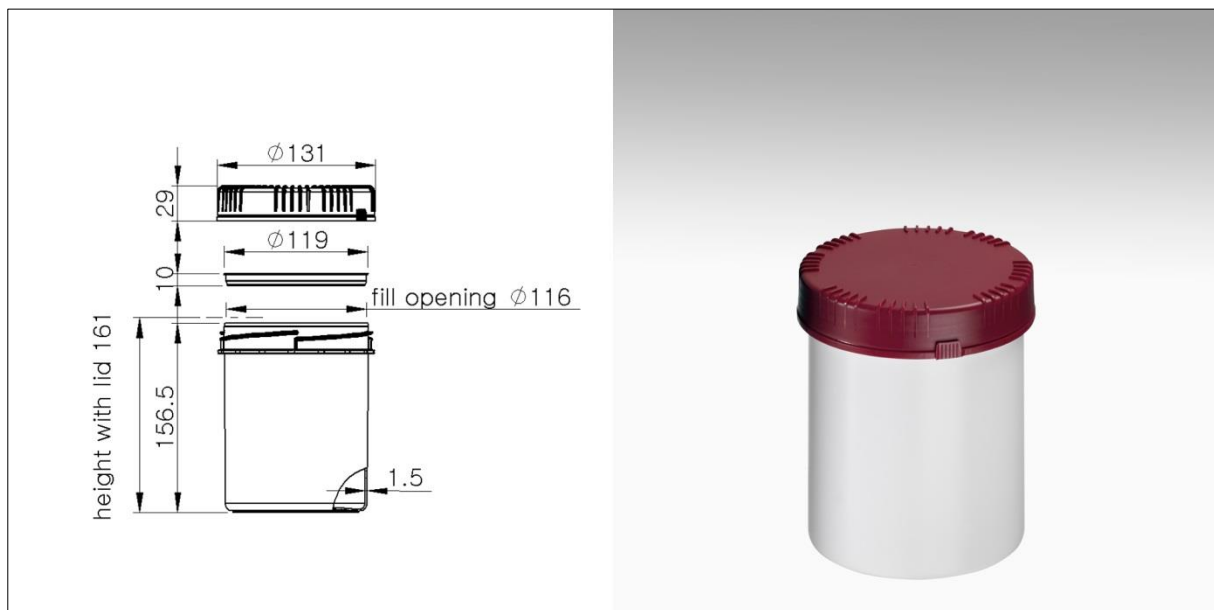

\*For tolerances see next page

| Product part | Product code | Description   |
|--------------|--------------|---------------|
| Container    | 4315-60-004  | 1500 ml Packo |
| Lid          | 4355-70-402  | Screw lid     |
| Inner seal   | 4365-00-000  | Inner seal    |

| Capacity    | ml   | floz |
|-------------|------|------|
| Brimful     | 1575 | 53.7 |
| When closed | 1500 | 50.7 |

| Raw material |      |
|--------------|------|
| Container    | HDPE |
| Lid          | HDPE |
| Inner seal   | MDPE |

| Weight     | Grams | Ounces |
|------------|-------|--------|
| Container  | 101   | 3.56   |
| 1C Lid     | 39.6  | 1.4    |
| Inner seal | 13.6  | 0.48   |
| Total      | 154.2 | 5.44   |

| Colours         | Colour code | PMS references |
|-----------------|-------------|----------------|
| Container & Lid | White 004   | n/a            |
| Lid             | Red 402     | Red 199 C      |
|                 | Yellow 205  | Yellow 108C    |
|                 | Grey 135    | Cool Gray 7 C  |
|                 | Red 480     | Red 7645 C     |
|                 | Green 505   | Green 378 C    |
|                 | Blue 605    | Blue 300 C     |
|                 | Black 101   | Black C        |

| Hazmat information      |                               |
|-------------------------|-------------------------------|
| Hazmat type             | Solids                        |
| Packaging group         | I – II – III                  |
| UN marking              | 1H2/X2.0/S/--/B/CURTEC-080062 |
| Maximum gross mass (kg) | X=2.0 Y=3.0 Z=4.5             |

| Product identification       | Container | Lid    |
|------------------------------|-----------|--------|
| Manufacturer ID              | Bottom    | --     |
| Country of origin            | Bottom    | --     |
| Product code                 | Bottom    | --     |
| Recycle logo / Material type | Bottom    | Inside |
| Date clock                   | Bottom    | Inside |
| UN-mark                      | Bottom    | --     |
| Food logo                    | Bottom    | -      |
| Material track clock         | Bottom    | --     |

| Other information                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Packo consists of a container with a transparent insert and a lid with tear-off tamper evident seal</p> <p>Open and close with just a quarter-turn</p> <p>Other colours and versions are available on request</p> <p>Maximum filling temperature is 70°C/ 158°F</p> <p>Contents must have cooled to 30°C/ 86°F before containers can be closed and stacked</p> <p>DoC available on request</p> <p>UN certificate available on request</p> <p>MVTR declaration available on request</p> <p>User manual available on request</p> |

| Dimensional tolerance (mm) according to DIN16742-TG7 |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|------------------------------------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| Over                                                 | 1    | >3   | >6   | >10  | >18  | >30  | >50  | >80  | >120 | >180 | >250 | >315 | >400 | >500 | >630 | >800 |
| up to                                                | 3    | 6    | 10   | 18   | 30   | 50   | 80   | 120  | 180  | 250  | 315  | 400  | 500  | 630  | 800  | 1000 |
| NW (±)                                               | 0.20 | 0.29 | 0.35 | 0.42 | 0.50 | 0.60 | 0.90 | 1.25 | 1.45 | 1.60 | 1.80 | 2.60 | 3.50 | 4.00 | 4.50 | 5.00 |

| Weight tolerance                                                                                     |
|------------------------------------------------------------------------------------------------------|
| All products have a weight tolerance of $\pm 4\%$ of the initial weight mentioned on this data sheet |

© 2016 Property of CurTec International B.V. All rights explicitly reserved, it is not allowed to copy or communicate to other parties without written consent of CurTec.