


# 4303

## 300 ml Packo

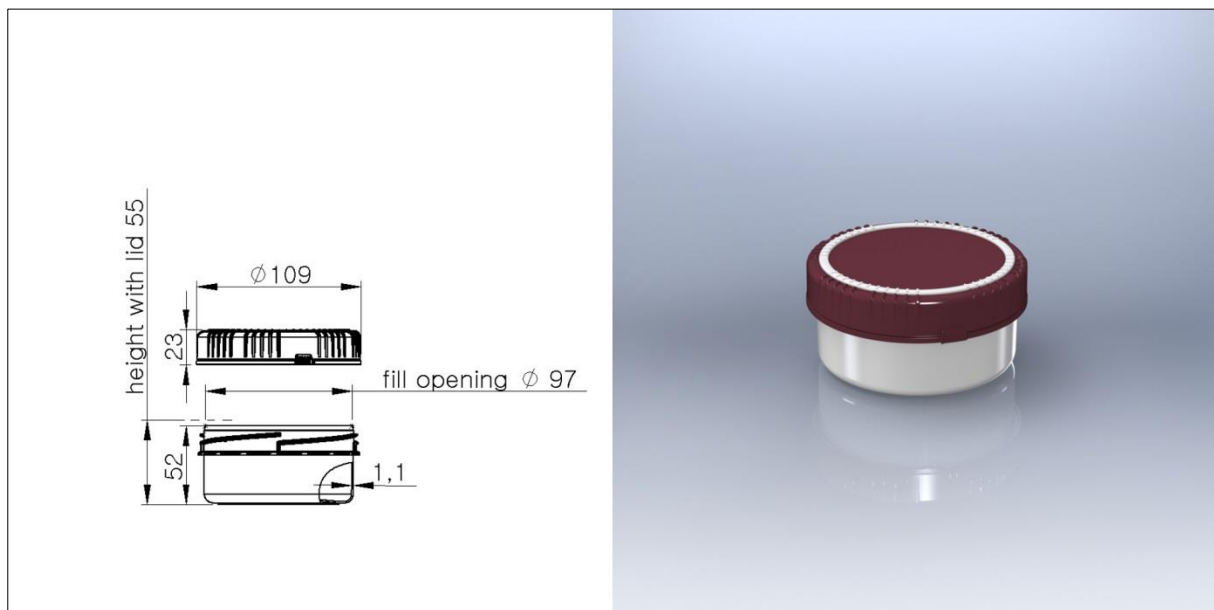

\*For tolerances see next page

| Product part | Product code | Description                      |
|--------------|--------------|----------------------------------|
| Container    | 4303-70-004  | 300 ml Packo                     |
| Lid          | 4370-70-480  | Screw lid with integrated gasket |

| Capacity    | ml  | floz |
|-------------|-----|------|
| Brimful     | 360 | 12.2 |
| When closed | 310 | 10.5 |

| Raw material      |      |
|-------------------|------|
| Container         | HDPE |
| Lid               | HDPE |
| Integrated gasket | TPE  |

| Weight    | Grams | Ounces |
|-----------|-------|--------|
| Container | 24    | 0.85   |
| 2C Lid    | 28.1  | 0.99   |
| Total     | 52.1  | 1.84   |

| Colours         | Colour code | PMS references |
|-----------------|-------------|----------------|
| Container & Lid | White 004   | n/a            |
| Lid             | Red 402     | Red 199 C      |
|                 | Yellow 205  | Yellow 108C    |
|                 | Grey 135    | Cool Gray 7 C  |
|                 | Red 480     | Red 7645 C     |
|                 | Green 505   | Green 378 C    |
|                 | Blue 605    | Blue 300 C     |
| Container & Lid | Black 101   | Black C        |

| Hazmat information      |                                          |
|-------------------------|------------------------------------------|
| Hazmat type             | Solids                                   |
| Packaging group         | I – II – III                             |
| UN marking              | 1H2/X0.4/Y0.6/Z0.9/S/--/NL/CURTEC-110503 |
| Maximum gross mass (kg) | X=0.4 Y=0.6 Z=0.9                        |

| Product identification       | Container | Lid    |
|------------------------------|-----------|--------|
| Manufacturer ID              | Bottom    | --     |
| Country of origin            | Bottom    | --     |
| Product code                 | Bottom    | --     |
| Recycle logo / Material type | Bottom    | Inside |
| Date clock                   | Bottom    | Inside |
| UN-mark                      | Bottom    | --     |
| Food logo                    | Bottom    | -      |
| Material track clock         | Bottom    | --     |

| Other information                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Packo consists of a container and a lid with tear-off tamper evident seal</p> <p>Open and close with just a quarter-turn</p> <p>Other colours and versions are available on request</p> <p>Maximum filling temperature is 70°C/ 158°F</p> <p>Contents must have cooled to 30°C/ 86°F before containers can be closed and stacked</p> <p>DoC available on request</p> <p>UN certificate available on request</p> <p>MVTR declaration available on request</p> <p>User Manual available on request</p> |

| Dimensional tolerance (mm) according to DIN16742-TG7 |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|------------------------------------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| Over                                                 | 1    | >3   | >6   | >10  | >18  | >30  | >50  | >80  | >120 | >180 | >250 | >315 | >400 | >500 | >630 | >800 |
| up to                                                | 3    | 6    | 10   | 18   | 30   | 50   | 80   | 120  | 180  | 250  | 315  | 400  | 500  | 630  | 800  | 1000 |
| NW (±)                                               | 0.20 | 0.29 | 0.35 | 0.42 | 0.50 | 0.60 | 0.90 | 1.25 | 1.45 | 1.60 | 1.80 | 2.60 | 3.50 | 4.00 | 4.50 | 5.00 |

| Weight tolerance                                                                               |
|------------------------------------------------------------------------------------------------|
| All products have a weight tolerance of ±4% of the initial weight mentioned on this data sheet |

© 2016 Property of CurTec International B.V. All rights explicitly reserved, it is not allowed to copy or communicate to other parties without written consent of CurTec.